

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number  
**WO 2005/050237 A1**

(51) International Patent Classification<sup>7</sup>: **G01R 33/34**

(74) Common Representative: **KONINKLIJKE PHILIPS ELECTRONICS, N.V.**; c/o LUNDIN, Thomas, M. 595 Miner Road, Cleveland, Ohio 44143 (US).

(21) International Application Number:  
PCT/IB2004/052290

(22) International Filing Date:  
3 November 2004 (03.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/520,880 18 November 2003 (18.11.2003) US

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS, N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for AE only): **U.S. PHILIPS CORPORATION** [US/US]; 1251 Avenue of the Americas, New York, New York 10020 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LEUSSLER, Christoph, G.** [DE/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

[Continued on next page]

(54) Title: **HYBRID TEM/BIRDCAGE COIL FOR MRI**

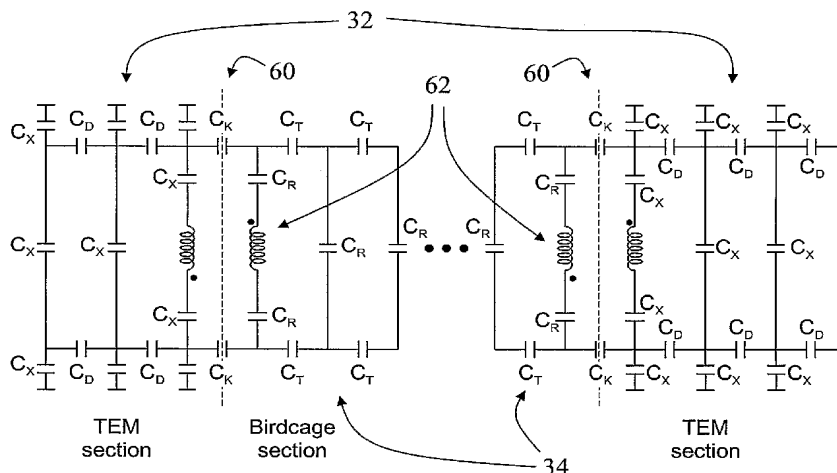

(57) Abstract: A radio frequency coil (30, 30', 120, 120') for a magnetic resonance imaging system (10, 10") includes a birdcage section (34, 122, 122') having a plurality of parallel spaced apart conductors (46, 130, 130') and one or more cross or end conductors (48, 132, 144', 154, 156) aligned generally transverse to the spaced apart conductors (46, 130, 130'), and a TEM section (32, 32', 32", 124, 124') having a plurality of parallel spaced apart conductors (40, 40', 140) and a radio frequency screen (42, 142, 144, 144'). The birdcage section (34, 122, 122') and the TEM section (32, 32', 32", 124, 124') resonate at a birdcage resonant frequency and a TEM resonant frequency, respectively. The birdcage section (34, 122, 122') and the TEM section (32, 32', 32", 124, 124') are relatively disposed with the parallel spaced apart conductors of each section aligned and define a subject receiving region.

WO 2005/050237 A1

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ,

BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## HYBRID TEM/BIRDCAGE COIL FOR MRI

### DESCRIPTION

The following relates to the magnetic resonance arts. It finds particular application in magnetic resonance imaging, and will be described with particular reference thereto. However, it also finds application in magnetic resonance spectroscopy and other magnetic resonance applications.

Two types of radio frequency coils commonly used in magnetic resonance imaging are birdcage coils and transverse electromagnetic (TEM) coils. Each type of coil has certain advantages and disadvantages.

Birdcage coils include a plurality of parallel spaced apart conductors (sometimes called "rungs") on the surface of a cylinder and end conductors in the form of an end cap and a ring or a pair of end rings transverse to the rungs. The resonance modes of these coils are typically a single whole volume resonator with current flowing rung-to-rung. Birdcage coils can have a substantially open geometry that does not produce claustrophobic effects on human imaging subjects, thus promoting patient comfort. Birdcage coils also exhibit good radio frequency properties, such as high quality factors, for frequencies of about 128 MHz or lower, corresponding to proton resonance in main ( $B_0$ ) magnetic fields of about 3T or lower. However, for higher frequencies corresponding to  $B_0 > 3T$  birdcage coil performance is increasingly limited by strong coupling with imaging subject tissue and radiative losses of the radio frequency energy.

TEM coils include a plurality of parallel spaced apart conductors (sometimes called "rungs") and a coupled cylindrical radio frequency screen providing current return paths. Resonance modes of TEM coils are typically rung-to-screen, although some rung-to-rung resonance modes may also be supported. The radio frequency screen is typically a metal mesh or conductive foil. TEM coils typically provide improved radio frequency performance compared with birdcage coils for higher frequencies corresponding to  $B_0 > 3T$  due at least to radiative loss reductions provided by the screen. However, TEM head coils or whole-body coils have the disadvantage of enclosing the head or the entire imaging subject, respectively, within the cylindrical radio frequency screen. Human imaging subjects sometimes find such confined enclosure be claustrophobic.

A problem common to both birdcage and TEM coils is their fixed diameter, which is

determined by the diameter of the rings in the case of a birdcage coil, and by the diameter of the cylindrical radio frequency screen in the case of a TEM coil. A coil approximately sized to match the imaging subject improves radio frequency coupling with the imaging subject, allowing the input radio frequency power to be reduced. However, the cylindrical whole-body birdcage or TEM coil typically surrounds the patient bridge, or other components, which can complicate removal and insertion of different coils.

The present invention contemplates a new and improved method and apparatus which overcomes the above-referenced problem and others.

According to one aspect, a radio frequency coil is disclosed for a magnetic resonance imaging system, including a birdcage section and a TEM section. The birdcage section includes a plurality of parallel spaced apart conductors and one or more end conductors aligned generally transverse to the spaced apart conductors. The birdcage section resonates at a birdcage resonant frequency. The TEM section includes a plurality of parallel spaced apart conductors and a radio frequency screen. The TEM section resonates at a TEM resonant frequency. The birdcage section and the TEM section are relatively disposed with the parallel spaced apart conductors of each section aligned. The birdcage section and the TEM section cooperatively define a subject receiving region.

According to another aspect, a magnetic resonance imaging scanner is disclosed. A radio frequency coil including a birdcage section and a TEM section encompasses a subject receiving region. A magnet generates a temporally constant main magnetic field through the subject receiving region. A plurality of magnetic field gradient coils are arranged to produce magnetic field gradients across the main magnetic field in the subject receiving region. The birdcage section of the radio frequency coil includes a plurality of parallel spaced apart conductors and one or more end conductors aligned generally transverse to the spaced apart conductors. The birdcage section resonates at a birdcage resonant frequency. The TEM section of the radio frequency coil includes a plurality of parallel spaced apart conductors and a radio frequency screen. The TEM section resonates at a TEM resonant frequency. The birdcage section and the TEM section are relatively disposed with the parallel spaced apart conductors of each section aligned. The birdcage section and the TEM section cooperatively define the subject receiving

region.

According to yet another aspect, a radio frequency coil is disclosed. A birdcage section includes a plurality of parallel spaced apart conductors and one or more cross conductors disposed generally transverse to the spaced apart conductors. A TEM radio frequency screen section includes a radio frequency screen coupled with the birdcage section and having openings corresponding to spacings of the spaced apart conductors, and transparent or translucent dielectric material disposed in the openings of the radio frequency screen. The transparent or translucent dielectric material allows an associated imaging subject disposed inside the coil to see through the radio frequency coil.

One advantage resides in combining high patient visibility afforded by the relatively open birdcage configuration with improved high radio frequency characteristics afforded by the TEM coil configuration.

Another advantage resides in providing a removable, relatively open birdcage section that is swappable with at least one other coil section appropriate to a selected imaging procedure.

Yet another advantage resides in providing an asymmetric radio frequency coil having a generally planar TEM section integrated with the subject bridge and an arcuate birdcage portion.

Still yet another advantage resides in providing a coil that can be operated either as a volume resonator or as a phased coil array for parallel imaging, SENSE imaging, or the like.

Numerous additional advantages and benefits will become apparent to those of ordinary skill in the art upon reading the following detailed description of the preferred embodiments.

The invention may take form in various components and arrangements of components, and in various process operations and arrangements of process operations. The drawings are only for purposes of illustrating the preferred embodiments and are not to be construed as limiting the invention.

FIGURE 1 diagrammatically shows an end view of a magnetic resonance imaging scanner incorporating a radio frequency coil having a generally planar TEM section and an arcuate birdcage section.

FIGURE 2 diagrammatically shows a side view of the magnetic resonance imaging

scanner of FIGURE 1, in which about one-half of the scanner is cut away to show internal features. A movable couch for transporting an imaging subject into the scanner bore is also shown in FIGURE 2.

FIGURE 3 shows an electrical schematic of coupling of the TEM and birdcage sections to define a volume resonator.

FIGURE 4 shows an electrical schematic of another approach for coupling of the TEM and birdcage sections to define a volume resonator.

FIGURE 5 shows an end view of a generally cylindrical radio frequency coil having coupled TEM and birdcage sections. FIGURE 5 also shows suitable port connections for driving the coil as a volume resonator.

FIGURE 6 shows a method for selectively coupling or decoupling individual conductors or rungs of a radio frequency coil having birdcage and TEM sections, and driving electronics for operating the selectively coupled and decoupled rungs as a phased coils array.

FIGURES 7A, 7B, 7C, and 7D show electrical schematics of several phased coils array configurations obtained by selectively defining sub-coils through the selective coupling and decoupling of conductors or rungs of a radio frequency coil having birdcage and TEM sections.

FIGURE 8 diagrammatically shows an end view of a magnetic resonance imaging scanner incorporating a radio frequency coil having a generally planar TEM section and an arcuate birdcage section, in which an outer shielding radio frequency screen also serves as the radio frequency screen of the TEM section of the coil.

FIGURE 9 diagrammatically shows an end view of a magnetic resonance imaging scanner incorporating a radio frequency coil having a generally planar TEM section and two swappable arcuate birdcage sections of different sizes.

FIGURE 10 diagrammatically shows three radio frequency coils of different sizes each having a generally planar TEM section and an arcuate birdcage section. The three radio frequency coils are arranged at different positions along the axis of the magnet bore to image the head, torso, and legs, respectively, of a prone human imaging subject.

FIGURES 11 and 12 diagrammatically show radio frequency head coil embodiments each having a TEM section and a birdcage section.

FIGURE 13 diagrammatically shows a "rolled out" view of a radio frequency coil having a birdcage configuration and a relatively open radio frequency screen.

With reference to FIGURES 1 and 2, in one embodiment a magnetic resonance scanner **10** includes a main housing **12** that houses or support at least main magnetic field coils **14** and magnetic field gradient coils **16**. The main magnetic field coils **14** generate a main  $B_0$  field along a magnet bore **18** defined by the housing **12**, while the magnetic field gradient coils **16** produce selected magnetic field gradients within the magnet bore **18**.

A shielding radio frequency screen approximately coextensive with the magnet bore **18** includes a generally planar bottom portion **22** and an arcuate upper portion **24**. A subject bridge **26** extends through the bore **18** and is disposed above the generally planar bottom portion **22** of the shielding radio frequency screen. In another embodiment, the shielding radio frequency screen is cylindrical.

A radio frequency coil **30** includes a generally planar bottom transverse electromagnetic (TEM) section **32** and an arcuate upper birdcage section **34** together encompassing a subject receiving region. The TEM section **32** includes a plurality of conductors or rungs **40** and a radio frequency screen **42** capacitively coupled to the rungs **40** (couplings indicated in FIGURE 1). The birdcage section **34** includes a plurality of conductors or rungs **46** and transverse end members **48** in the form of arcuate partial rings or an arcuate end cap at one end and an arcuate ring at the other defining the arcuate cross-section of the birdcage section **34**.

The longitudinal conductors **40**, **46** and the conductive transverse cross members **48** can be, for example, conductive rods, copper traces formed on or in a printed circuit board, or the like. Capacitances in the conductors **40**, **46** and the transverse cross members **48** are preferably distributed along the conductive rods, copper traces, or the like, or can be discrete capacitors mounted on a printed circuit board and coupled with the conductors as a hybrid circuit.

An imaging subject **50** is moved into the magnet bore **18** and inside the the coil sections **32**, **34** using a movable pallet **54** supporting the imaging subject **50**, which is pushed, pulled, or otherwise moved along a top supporting surface the subject bridge **26**. In the embodiment of FIGURES 1 and 2, the rungs **40** of the TEM section **32** are disposed in slots **56** defined in the underside of the subject bridge **26**. Thus, the subject is disposed relatively close to the TEM section **32**.

With reference to FIGURE 1 and with further reference to FIGURE 3, which shows an

electrical schematic of connecting portions of the birdcage section 34 and the TEM section 32, the coil sections 32, 34 are optionally capacitively connected by capacitances 60 to form a volume resonator. The coupling capacitances 60 are represented in FIGURE 3 by capacitances  $C_K$ ; the rungs 46 and crossing members 48 of the birdcage section 34 include capacitances  $C_R$  and  $C_T$ , respectively; and the rungs 40 and radio frequency screen 42 of the TEM section 32 include capacitances  $C_X$  and  $C_D$ , respectively.

Optionally, the two sections 32, 34 can also be coupled by an inductive transformers 62 as indicated in FIGURE 3 to form a volume resonator. When the transformers 62 are used, the coupling capacitances  $C_K$  60 are optionally omitted. Advantageously, coupling using the inductive transformers 62 does not involve galvanic connections between the coil sections 32, 34. In another embodiment, a coaxial half-wave cable (not shown) is used for coupling the sections (32, 34) to define a volume resonator.

With reference to FIGURE 4, in another embodiment the two sections 32, 34 are coupled by spatially overlapping the ends of the birdcage and TEM sections 32, 34. The approach also has the advantage of not involving galvanic connections between the coil sections 32, 34. Coupling between the sections 32, 34 is principally due to inductive coupling between rungs 46 of the birdcage section 34 that overlap the radio frequency screen 42 of the TEM section 32, as indicated in FIGURE 4.

With returning reference to FIGURE 1, when the birdcage and TEM sections 32, 34 are coupled to define a volume resonator, the couplings at the two ends are preferably symmetric so that the volume resonator has a bilateral symmetry about a plane of symmetry 66. In the volume resonator configurations, the TEM section 32 and the birdcage section 34 resonate at a common volume resonance frequency. The impedances or other characteristics of the couplings 60, 62 between the two sections 32, 34 are selected to ensure resonance at the common volume resonance frequency.

With reference to FIGURE 5, a slightly modified radio frequency coil 30' has a curved elliptical or circular, rather than flat, TEM section 32' including conductors or rungs 40'. When the birdcage and TEM sections 32', 34 are coupled to define a volume resonator, in one embodiment the resonator is driven using separate transmit/receive or send/receive (S/R) channels, specifically four S/R channels 70, 72, 74, 76 in the example of FIGURE 5. Typically, at least two ports are coupled in each of the birdcage and TEM sections 32', 34 to provide



control of phase and amplitude: in FIGURE 5, S/R channels 70, 72 drive the birdcage section 34 while S/R channels 74, 76 drive the TEM section 32'. Other numbers and configurations of send/receive channels can also be used. In one embodiment, each conductor 46 of the birdcage section 34 and each conductor 40 of the TEM section 32' is separately driven by a dedicated send/receive channel. This allows individual conductors 40, 46 to be mutually coupled or decoupled to control homogeneity and signal-to-noise ratio. Similar driving arrangements can be used for the coil 30 of FIGURES 1 and 2 when coil 30 has sections 32, 34 interconnected to define a volume resonator.

With reference to FIGURE 6, selectable decoupling of conductors or rungs 40, 46 is provided to define a volume resonator or a selected phased array of sub-coils for use in parallel imaging modalities such as SENSE imaging. As shown in FIGURE 6, decoupling of selected conductors 40, 46 is suitably accomplished by connecting each conductor via coaxial or other shielded cabling 80 to a remote impedance network 82. Each sub-coil is individually driven by a dedicated send/receive channel 84. Rather than independently driving each sub-coil through the remote impedance network 82 to achieve a phased array, phase-shifting impedances such as phase shifting capacitances can be arranged between sub-coils to provide selected decouplings defining the phased array.

Using either active coupling/decoupling as described with reference to FIGURE 6 or passive decoupling using decoupling capacitors, one or both of the TEM section 32 and the birdcage section 34 can be operated as a phased coil array defined by sub-coils each made up of one or more of the conductors 40, 46. Selection of suitable decoupling impedances or of independent radio frequency driving signals for desired decouplings of the various conductors 40, 46 is described in Leussler, WO/02/095435 A1, published Nov. 28, 2002. In the case of active coupling and decoupling, different coil or sub-coil array configurations can be used for the radio frequency transmit and receive phases of the magnetic resonance imaging.

With reference to FIGURE 7A, a decoupled bandpass section is formed using a dedicated capacitor ratio of conductor 46 or crossing member 48 capacitors. In FIGURE 7B, inductive decoupling is achieved by selected overlap of sub-coils, or by including inductive transformers similar to the transformers 62 of FIGURE 3. FIGURE 7C shows a mixture of inductive and capacitive decoupling of individual sub-coils. FIGURE 7D shows decoupling of bandpass networks formed by the birdcage conductors 46 and the transverse crossing members 48, in

which the bandpass networks are decoupled from one another using additional ring conductors 48' with decoupling capacitances  $C_1$  and  $C_2$ .

FIGURE 8 shows a modified embodiment 10'' of a magnetic resonance imaging scanner including a modified radio frequency coil 30'', in which the lower shielding radio frequency screen 22 of the scanner 10 of FIGURE 1 is modified to form a lower radio frequency screen portion 22'' which also serves as the radio frequency screen of a modified TEM section 32''. In the embodiment of FIGURE 8, the conductors or rungs 40 of the modified TEM section 32'' are capacitively coupled to the shielding radio frequency screen portion 22'' so that the radio frequency screen portion 22'' acts both as an active component of the TEM section 32'' and as a shield for blocking stray radio frequency signals from interfering with other components of the scanner 10''. In the scanner 10'', the separate TEM radio frequency screen 42 is omitted, thus providing more space inside the magnet bore.

In the embodiment of FIGURE 9, the arcuate birdcage section is selected from a plurality of arcuate birdcage sections of different arc. FIGURE 9 shows the radio frequency coil 10 of FIGURE 1 with the birdcage section 34 electrically uncoupled from the TEM section 32. Optionally, the birdcage section 34 is replaced by a birdcage section 34''' formed of conductors or rungs 46''' and crossing members 48''' having a different arc. The replacement birdcage section 34''' has a different arc compared with the birdcage section 34 which places the birdcage section 34''' closer to the imaging subject 50 compared with the birdcage section 34. The closer arc of the replacement birdcage section 34''' may be advantageous for imaging a smaller imaging subject, as it provides stronger radio frequency signal coupling therewith.

While two swappable birdcage sections 34, 34''' are illustrated in FIGURE 9, additional swappable birdcage sections having other arcs or other characteristics can also be provided. For example, a swappable birdcage section can include unevenly spaced rungs to provide meshes of different sizes. In the illustrated embodiment, the TEM section 32 is mechanically integrated with the subject bridge 26 and is not removed when swapping the birdcage sections 34, 34''. In forming volume resonators, different capacitive or inductive coupling elements may be used for coupling each swappable birdcage section 34, 34''' with the TEM section 32 to achieve the desired common volume resonance. It will be appreciated that the arcuate birdcage sections 34, 34''' can have various cross-sectional shapes, such as having an elliptic shape or an asymmetric shape. Moreover, some swappable birdcage sections may include ports for coupling with the

impedance network **82** to provide actively selected sub-coil arrays, while other swappable birdcage section may include fixed passive decoupling impedances or may be designed without decoupling elements for use as volume resonators.

With reference to FIGURE 10, a plurality of radio frequency coils **90, 92, 94** each having a birdcage section **100, 102, 104** and a TEM section **110, 112, 114** defining a coil bore are arranged along the magnet bore **18** (indicated by dotted lines in FIGURE 10). Use of a plurality of coils arranged along the axis of the bore **18** allows each coil to be optimized for a particular imaging region of interest. For example, the coil **90** is sized to match a head region of a prone human imaging subject, the coil **92** is sized to match the torso region of the prone human imaging subject, and the coil **94** is sized to match the legs region of the prone human imaging subject. Each coil **90, 92, 94** can be connected to one or more dedicated transmit/receive magnetic resonance spectrometers for specific imaging applications.

With reference to FIGURE 11, a human head **118** is illustrated disposed inside a dedicated head radio frequency coil **120** that includes a birdcage section **122** and a TEM section **124**. The birdcage section **122** includes parallel spaced apart conductors or rungs **130** and transverse cross members **132** (indicated diagrammatically in FIGURE 11). The TEM section **124** includes parallel spaced apart conductors or rungs **140** and a radio frequency screen having a first screen portion **142** disposed adjacent the parallel spaced apart conductors or rungs **140** and an endcap screen portion **144** transverse to the parallel spaced apart conductors or rungs **140**. The first screen portion **142** can be planar, smoothly curved, or contoured to approximately match contours of the head **118**.

The endcap screen portion **144** provides a radio frequency reference ground so that the coil **120** is less perturbed by cable waves. The endcap screen portion **144** also reduces radiative energy losses and reflects radio frequency energy back into the imaging region. The birdcage section can be shielded by a transparent or translucent radio frequency screen with openings between the rungs **140** to provide visibility for the subject **118**. (This arrangement is similar to the radio frequency coil shown in FIGURE 13, discussed *infra*). In another embodiment, a birdcage screen is provided (not shown) that includes rungs similar to the rungs **140** but at a larger spacing from the head **118**. The birdcage screen can be resonant or non-resonant. The coil **120** can also be used as a volume coil in which the top and bottom sections **122, 124** are connected by impedance networks. In another imaging approach, individual conductors are

mutually decoupled passively or using an impedance network, so that the head coil **120** serves as a phased coils array for parallel imaging or SENSE imaging.

With reference to FIGURE 12, a head coil **120'** similar to the head coil **120** of FIGURE 11 is shown. The coil **120'** differs from the coil **120** in that a modified TEM section **124'** has a modified endcap screen portion **144'** that also serves as an end member for interconnecting parallel spaced apart conductors or rungs **130'** of a modified birdcage section **122'**. The rungs **130'** are connected with the endcap screen portion **144'** by capacitances  $C_s$ . At higher frequencies, the radio frequency screen optionally is extended to also cover the top birdcage portion **122'** to further reduce radiative losses.

With reference to FIGURE 13, another approach for retaining the relative openness of the birdcage coil configuration while obtaining the substantial high frequency benefits of a TEM-type coil is described. A radio frequency coil **150** is shown in a "rolled out" or planar view in which the generally cylindrical coil is unrolled and laid out flat for illustrative purposes.

The coil **150** includes a plurality of conductors or rungs **152** each having a capacitance  $C_R$  formed using stripline technology on printed circuit boards or another suitable substrate. Top and bottom transverse end members **154**, **156** are similarly formed and include capacitances  $C_T$ . The capacitances  $C_R$  and  $C_T$  can be lumped discrete components, distributed components, or some combination thereof. Moreover, it will be appreciated that although the end members **154**, **156** appear linear in the "rolled out" view of FIGURE 13, the end members **154**, **156** are actually rings arranged transverse to the rungs **152**. The conductors or rungs **152** and the end member rings **154**, **156** are disposed on a TEM radio frequency screen **158** that substantially reduces radiative energy losses. The TEM radio frequency screen **158** defines a cylinder. Transparent or translucent dielectric material **160** is disposed in openings of the radio frequency screen **158** between the conductors **152** and between the cross members **154**, **156**. In one embodiment the dielectric material **160** is air. The transparent or translucent dielectric material **160** provides improved visibility for a human imaging subject, while the TEM radio frequency screen **158** supports a resonance mode resonating at least between the conductors **152** and the TEM radio frequency screen **158** to improve radio frequency characteristics of the coil **150**.

The invention has been described with reference to the preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be

construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

**CLAIMS**

Having thus described the preferred embodiments, the invention is now claimed to be:

1. A radio frequency coil (30, 30', 30'', 120, 120') for a magnetic resonance imaging system (10, 10''), the radio frequency coil (30, 30', 120, 120') comprising:

5 a birdcage section (34, 122, 122') including a plurality of parallel spaced apart conductors (46, 130, 130') and one or more end conductors (48, 132, 144', 154, 156) aligned generally transverse to the spaced apart conductors (46, 130, 130'), the birdcage section (34, 122, 122') resonating at a birdcage resonant frequency; and

10 a TEM section (32, 32', 32'', 124, 124') including a plurality of parallel spaced apart conductors (40, 40', 140) and a radio frequency screen (42, 142, 144, 144'), the TEM section (32, 32', 32'', 124, 124') resonating at a TEM resonant frequency; wherein

the birdcage section (34, 122, 122') and the TEM section (32, 32', 32'', 124, 124') are relatively disposed with the parallel spaced apart conductors of each section aligned, the birdcage section (34, 122, 122') and the TEM section (32, 32', 32'', 124, 124') cooperatively  
15 defining a subject receiving region.

2. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 1, wherein the parallel spaced apart conductors (46, 130, 130') of the birdcage section (34, 122, 122') and the parallel spaced apart conductors (40, 40', 140) of the TEM section (32, 32', 32'', 124, 124') each include one or more electrically interconnected components selected from a group  
20 consisting of:

- a linear printed copper trace on a printed circuit board,
- a discrete capacitance, and
- a conductive rod.

3. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 1, wherein  
25 the birdcage resonant frequency equals the TEM resonant frequency, the radio frequency coil (30, 30', 120, 120') further comprising:

couplings (60, 62) between the birdcage section (34, 122, 122') and the TEM section (32, 32', 32'', 124, 124'), the couplings (60, 62) cooperating with the birdcage section and the TEM section to define a volume resonator.

4. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 3, wherein the couplings (60, 62) are selected from a group consisting of:

a radio frequency inductive transformer (62),

a capacitive coupling (60),

5 a coaxial half-wave cable, and

overlapping portions of the birdcage and TEM sections.

5. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 1, further including:

couplings (80, 82) selectively arranged between selected spaced apart conductors of at  
10 least one of the birdcage section (34, 122, 122') and the TEM section (32, 32', 32'', 124, 124');  
and

at least one radio frequency transmit/receive means (84) for selectively defining an array of resonators,.

6. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 5, wherein  
15 the couplings include one of:

phase-shifting impedances arranged between selected spaced apart conductors, and

a decoupling impedance network (80, 82).

7. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 5, wherein the array of resonators define one of:

20 a phased array of coils, and

a SENSE coil array.

8. The radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 5, wherein the couplings (80, 82) include active switching components (84) actively switched to effect the selective arrangement of the coupling/decoupling between selected parallel spaced apart  
25 conductors of at least one of the birdcage section (34, 122, 122') and the TEM section (32, 32', 32'', 124, 124').

9. The radio frequency coil (30, 30'', 120, 120') as set forth in claim 1, wherein:

the birdcage section (34, 122, 122') has an arcuate cross-section transverse to the parallel spaced apart conductors (46, 130, 130'); and

the TEM section (32, 32'', 124, 124') is substantially planar.

10. The radio frequency coil (30) as set forth in claim 1, further including:

5 a second birdcage section (34''') including a plurality of parallel spaced apart conductors (46''') and one or more cross conductors (48''') aligned generally transverse to the spaced apart conductors (46'''), the second birdcage coil (34''') resonating at a second birdcage resonant frequency, the second birdcage section (34''') being interchangeable with the birdcage section (34) such that the second birdcage section (34''') and the TEM section (32) are  
10 relatively disposed with the parallel spaced apart conductors of each section aligned, the second birdcage section (32''') and the TEM section (32) cooperatively defining the subject receiving region.

11. The radio frequency coil (120, 120') as set forth in claim 1, wherein the radio frequency screen (142, 144, 144') of the TEM section (124, 124') includes:

15 a first screen portion (142) disposed adjacent the parallel spaced apart conductors of the TEM section (120, 120'); and

an endcap screen portion (144, 144') transverse to the first screen portion (142) and transverse to the parallel spaced apart conductors (140) of the TEM section (120, 120').

12. The radio frequency coil (120') as set forth in claim 11, wherein the parallel spaced apart conductors (130') of the birdcage section (122') are capacitively coupled with the endcap screen portion (144') of the radio frequency screen (142, 144') of the TEM section (120').  
20

13. The radio frequency coil (30'') as set forth in claim 1, wherein the radio frequency screen (22'', 24) includes:

a TEM screen portion (22'') coupled with the parallel spaced apart conductors (40) of  
25 the TEM section (32''); and

a shielding screen portion (24) connected with the TEM screen portion (22''), the shielding screen portion (24) extending around outside the birdcage section (34) and together with the TEM screen portion (22'') defining a shielding radio frequency screen inside of which



the birdcage section (34) and the conductors (40) of the TEM section (32'') are disposed.

14. A magnetic resonance imaging scanner (10, 10'') including:

a radio frequency coil (30, 30', 30'', 120, 120') as set forth in claim 1 encompassing the subject receiving region;

5 a magnet (14) which generates a temporally constant main magnetic field through the subject receiving region; and

a plurality of magnetic field gradient coils (16) arranged to produce magnetic field gradients across the main magnetic field in the subject receiving region.

10 15. The magnetic resonance imaging scanner (10, 10'') as set forth in claim 14, wherein the radio frequency coil (30, 30', 30'', 120, 120') is further arranged with the conductive rods (40, 40', 46, 130, 130', 140) of the birdcage and TEM sections generally parallel to the main magnetic field.

16. The magnetic resonance imaging scanner (10, 10'') as set forth in claim 14, further including:

a subject supporting bridge (26) having slots (56) inside of which at least some of the parallel spaced apart conductors (40) of the TEM section (32) are disposed.

17. The magnetic resonance imaging scanner (10) as set forth in claim 14, further including:

20 a shielding radio frequency screen (22, 24) disposed around the radio frequency coil (30, 30', 120, 120') and spaced apart therefrom.

18. The magnetic resonance imaging scanner (10, 10'') as set forth in claim 14, further including:

25 a second birdcage section (34''') including a plurality of parallel spaced apart conductors (46''') and one or more cross conductors (48''') aligned generally transverse to the spaced apart conductors (46'''), the second birdcage coil (34''') resonating at a second birdcage resonant frequency, the second birdcage section (34''') being swappable for the birdcage

section (34) of the radio frequency coil (30) such that the second birdcage section (34''') and the TEM section (32) are relatively disposed with the parallel spaced apart conductors of each section aligned, the second birdcage section (32''') and the TEM section (32) cooperatively defining the subject receiving region.

5           19. A radio frequency coil (150) comprising:

          a birdcage section (152, 154, 156) including a plurality of parallel spaced apart conductors (152) and one or more cross conductors (154, 156) disposed generally transverse to the spaced apart conductors (152); and

          a TEM radio frequency screen section (158, 160) including a radio frequency screen  
10       (158) coupled with the birdcage section (152, 154, 156) and having openings corresponding to spacings of the spaced apart conductors 152, and transparent or translucent dielectric material (160) disposed in the openings of the radio frequency screen (158), the transparent or translucent dielectric material (160) allowing an associated imaging subject disposed inside the coil (150) to see through the radio frequency coil (150).

15           20. The radio frequency coil (150) as set forth in claim 19, wherein the transparent or translucent dielectric material (160) is air.

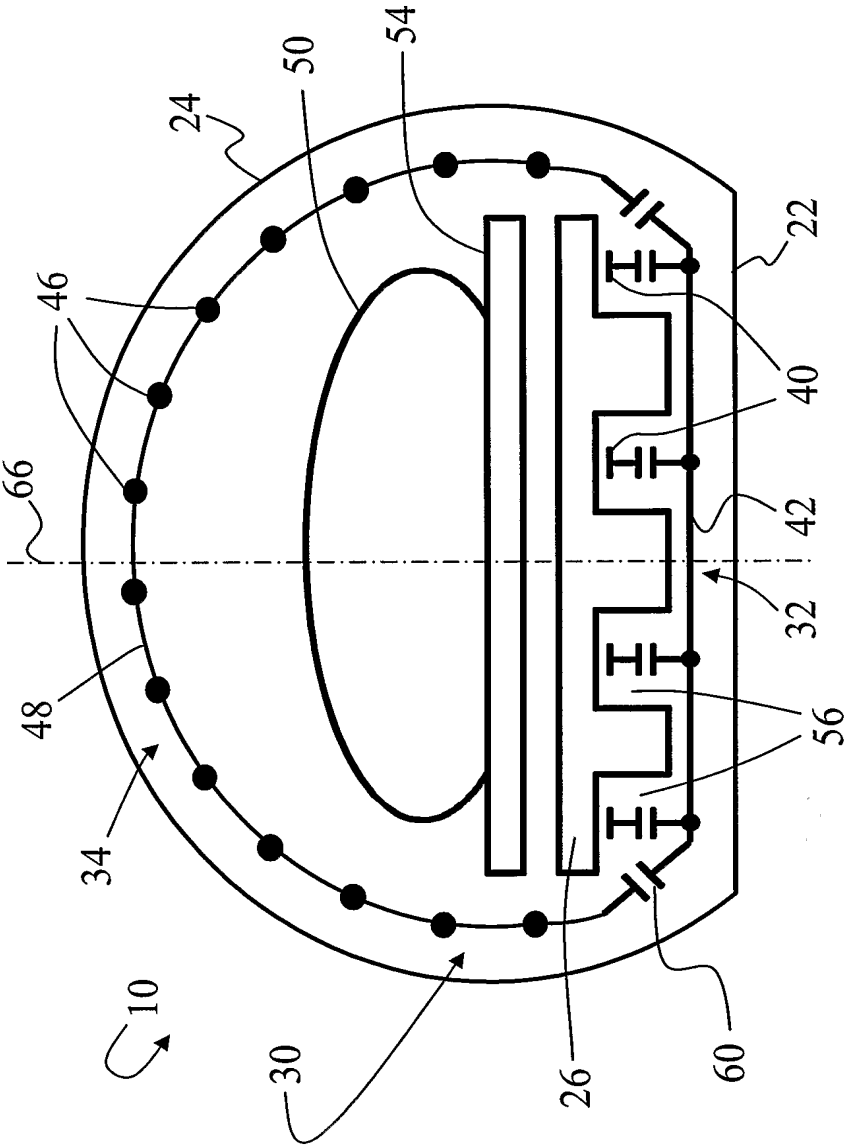


FIG 1

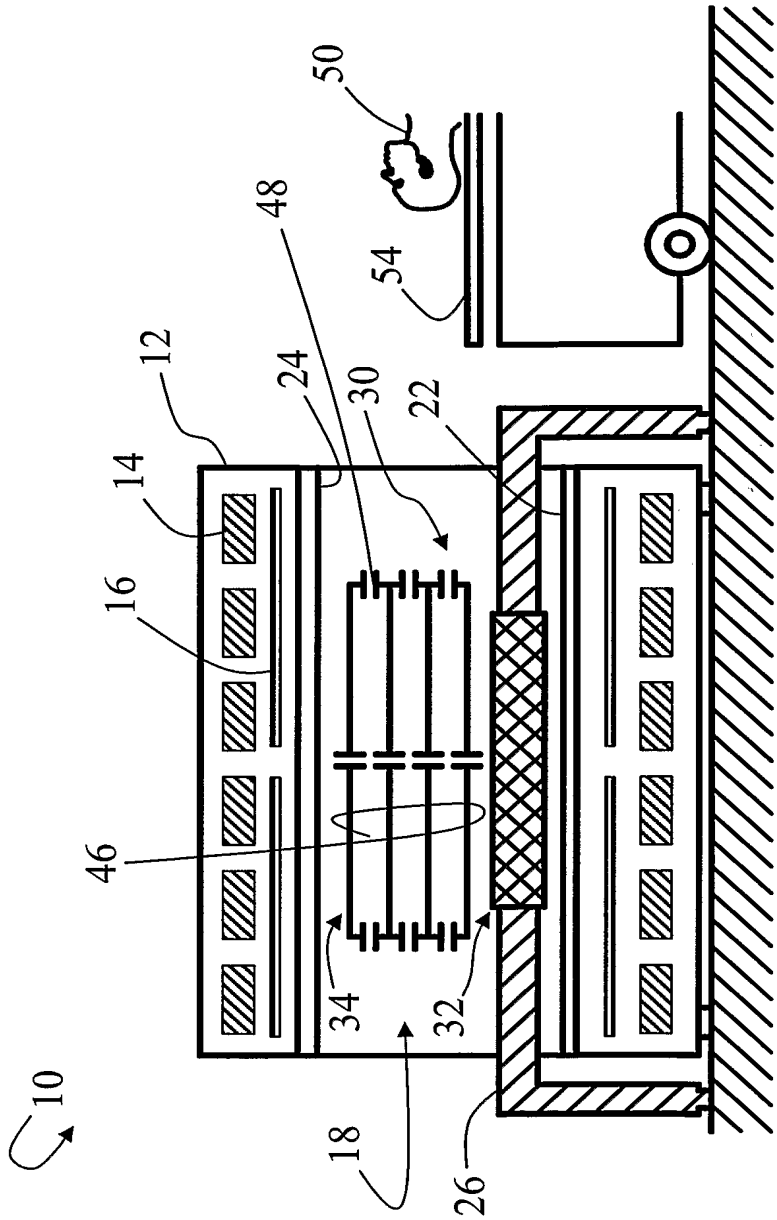


FIG 2

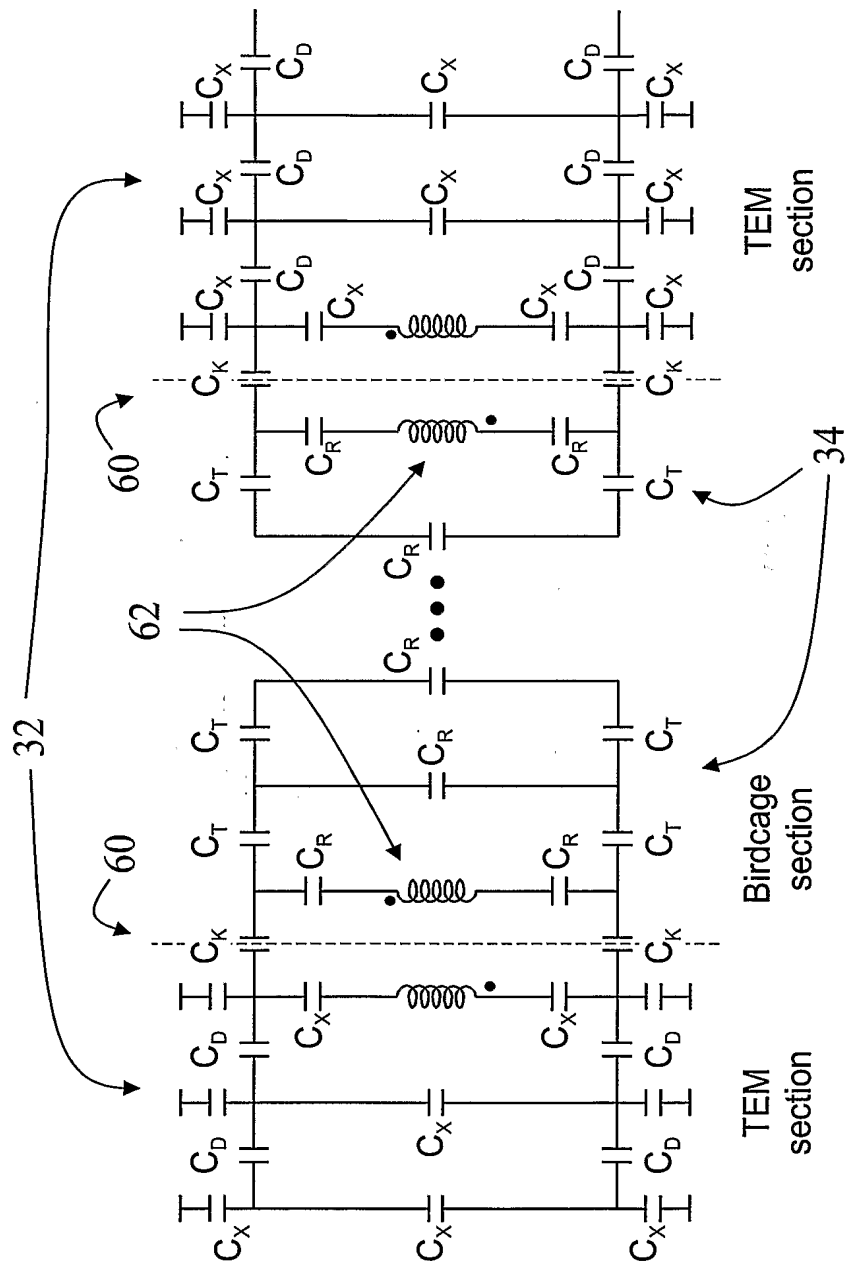


FIG 3

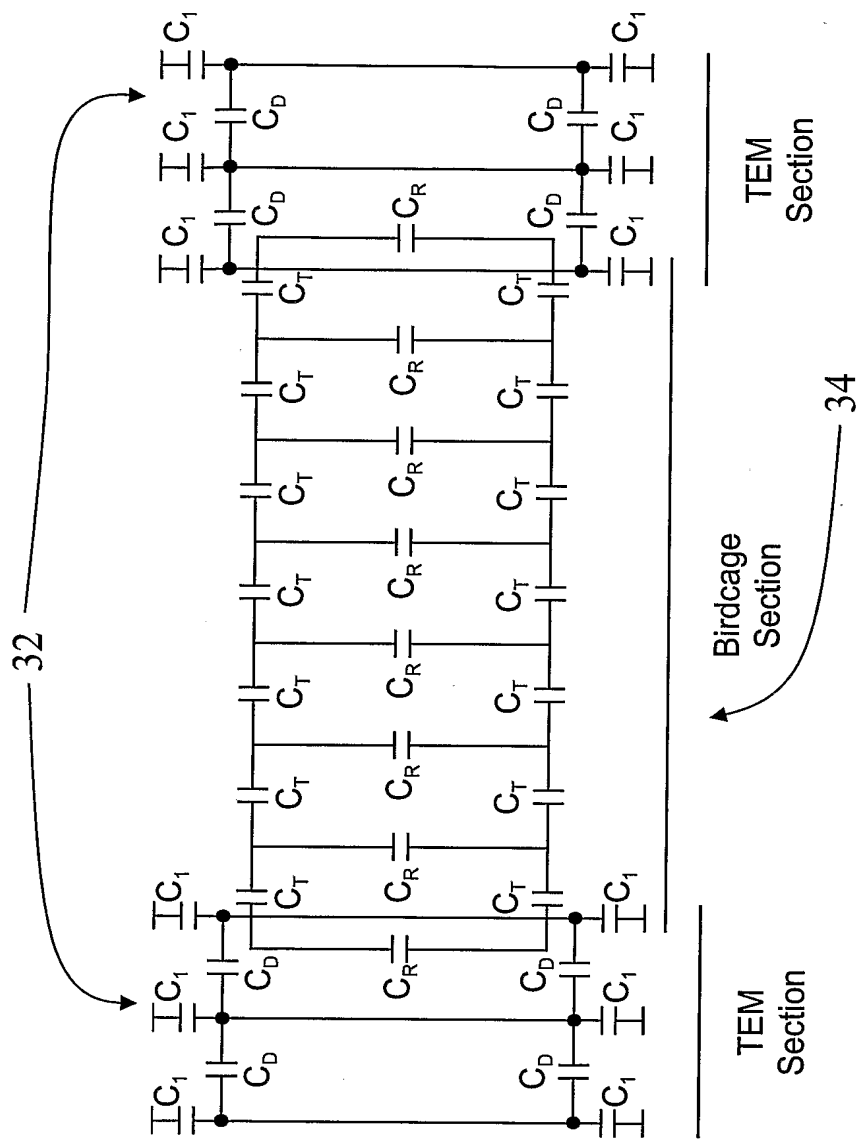
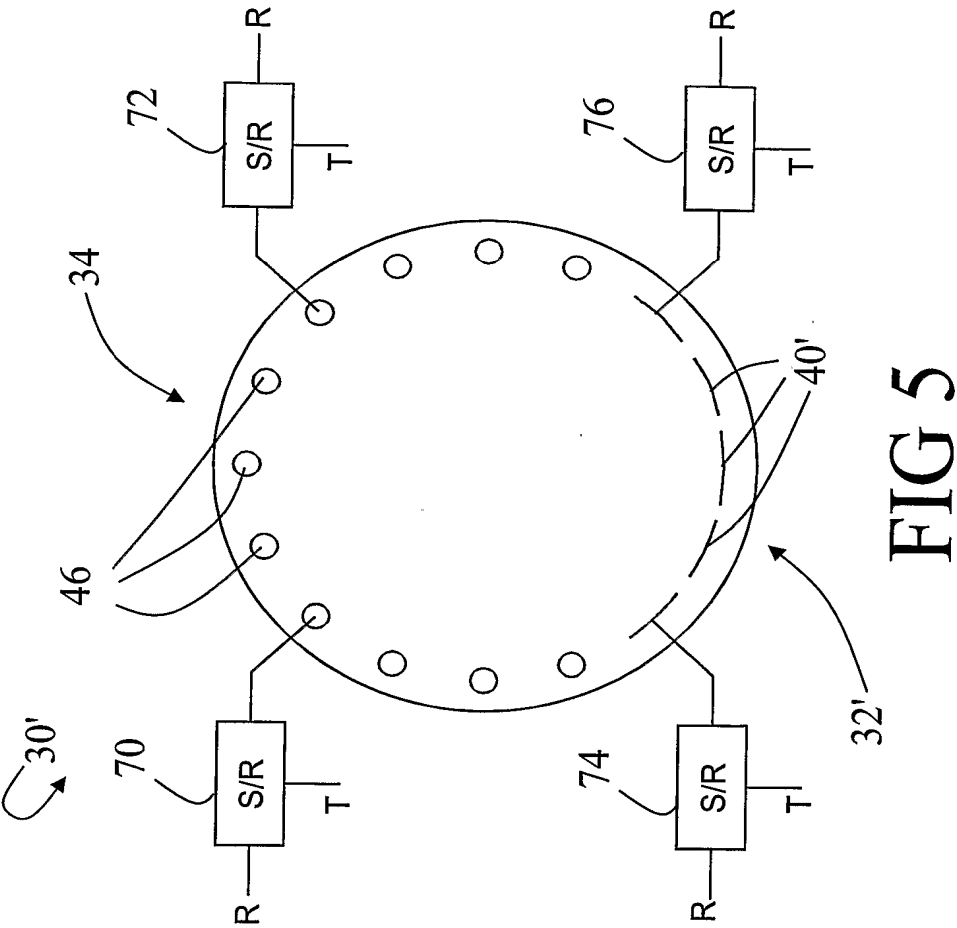


FIG 4



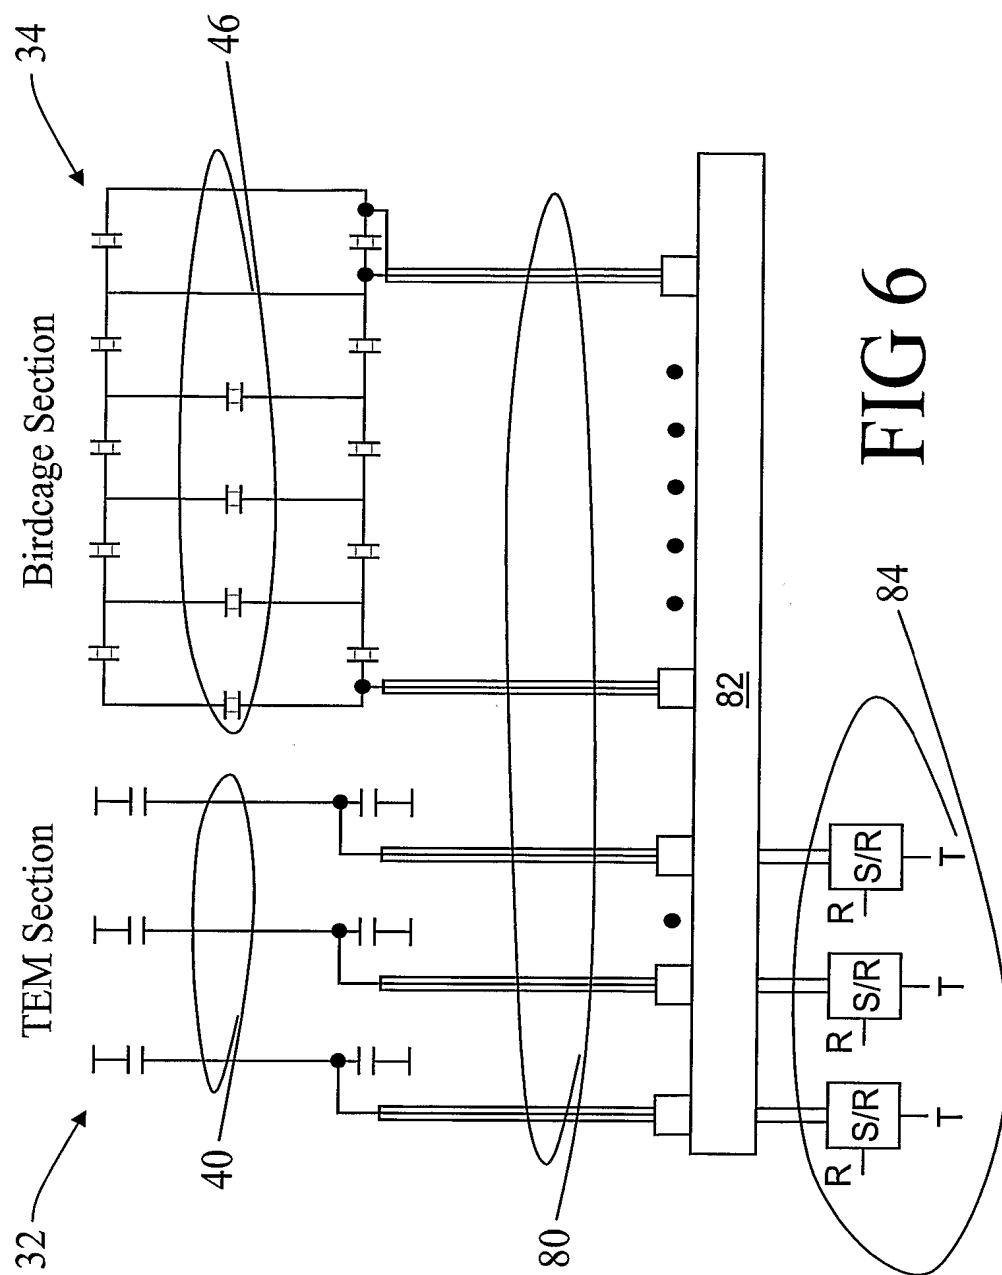


FIG 6



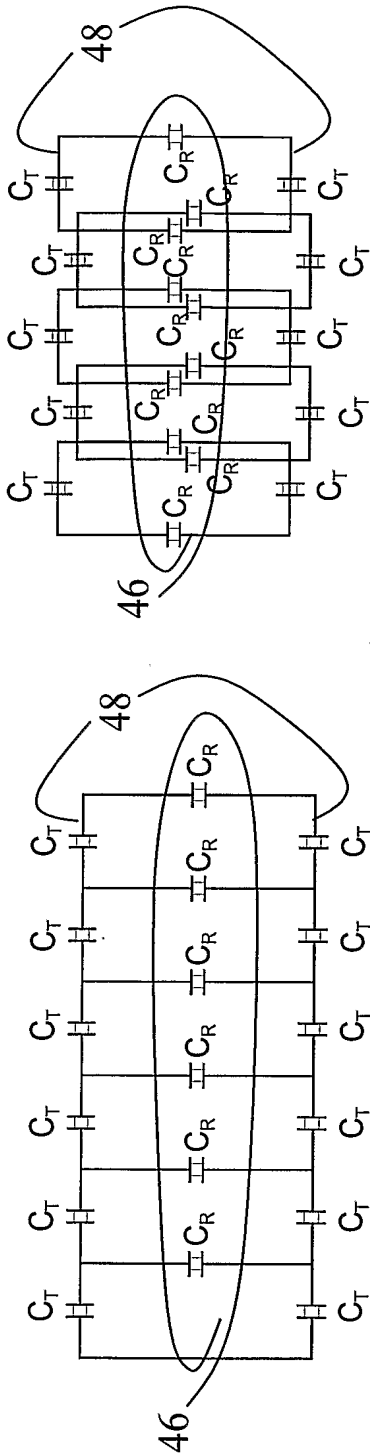


FIG 7B

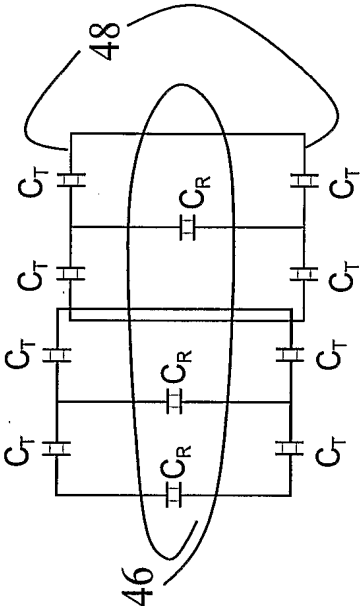


FIG 7C

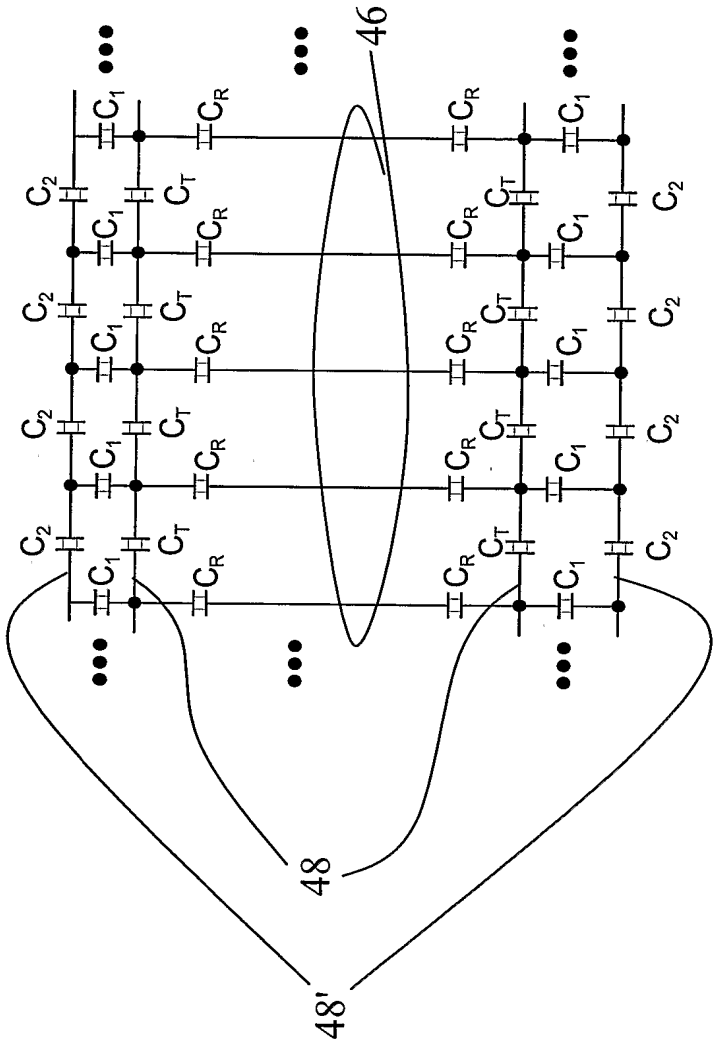
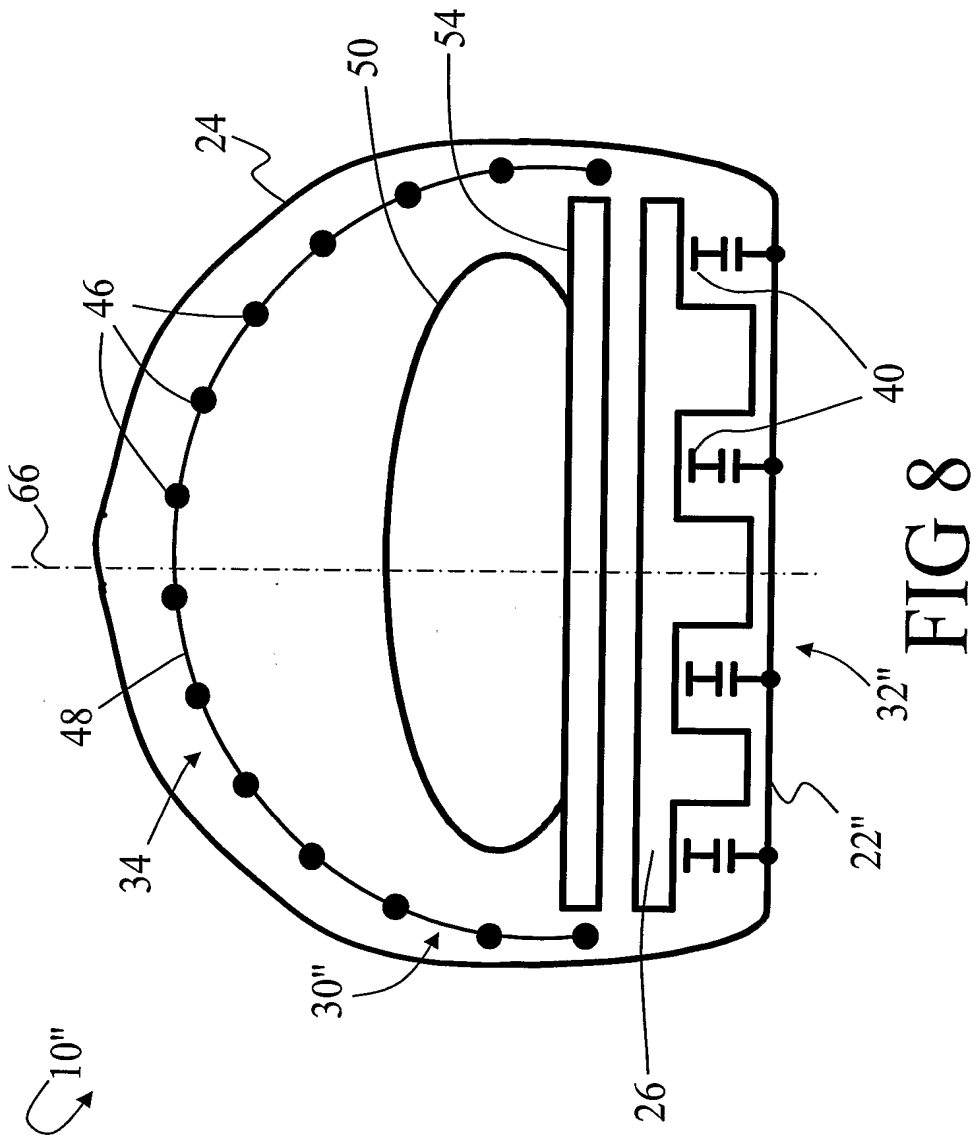


FIG 7D



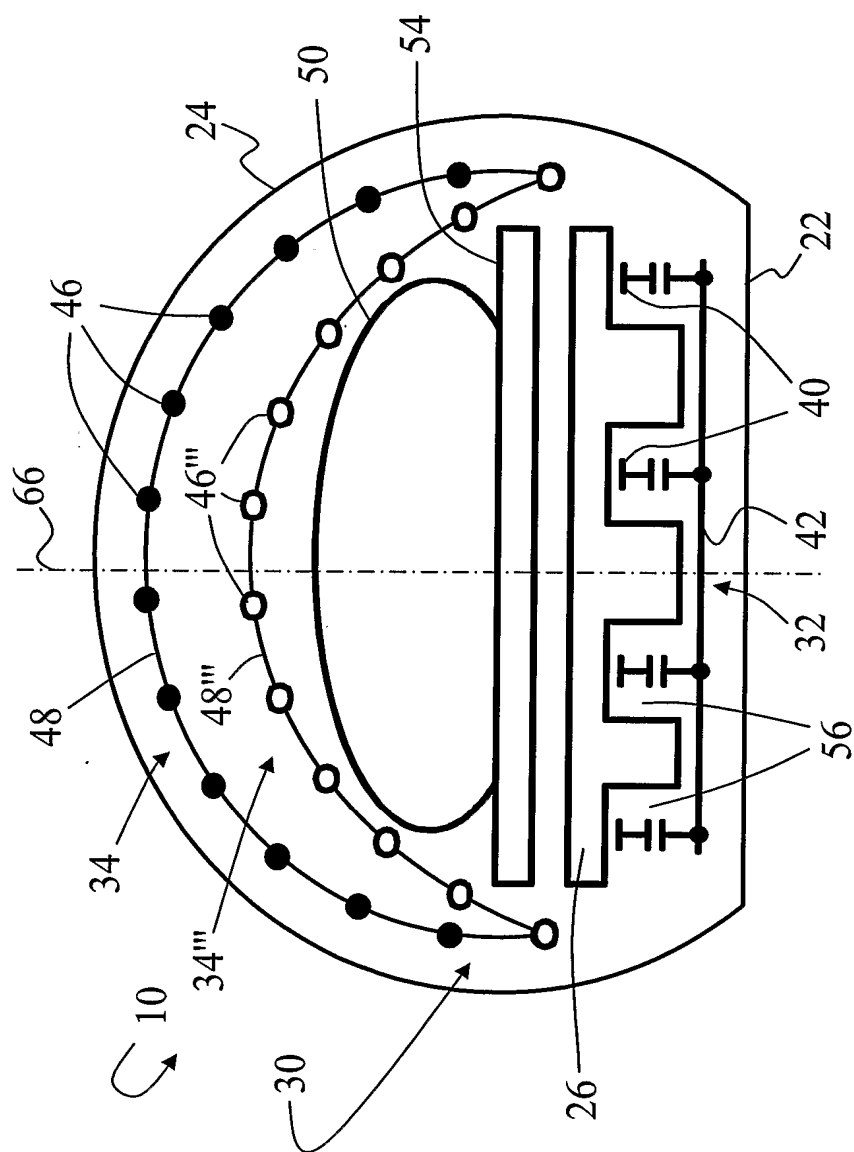


FIG 9

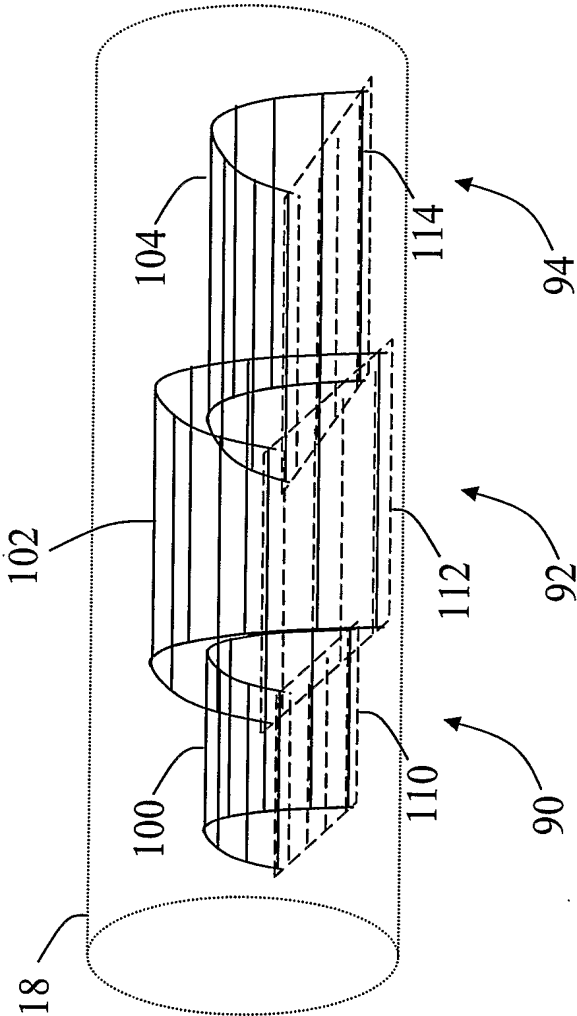
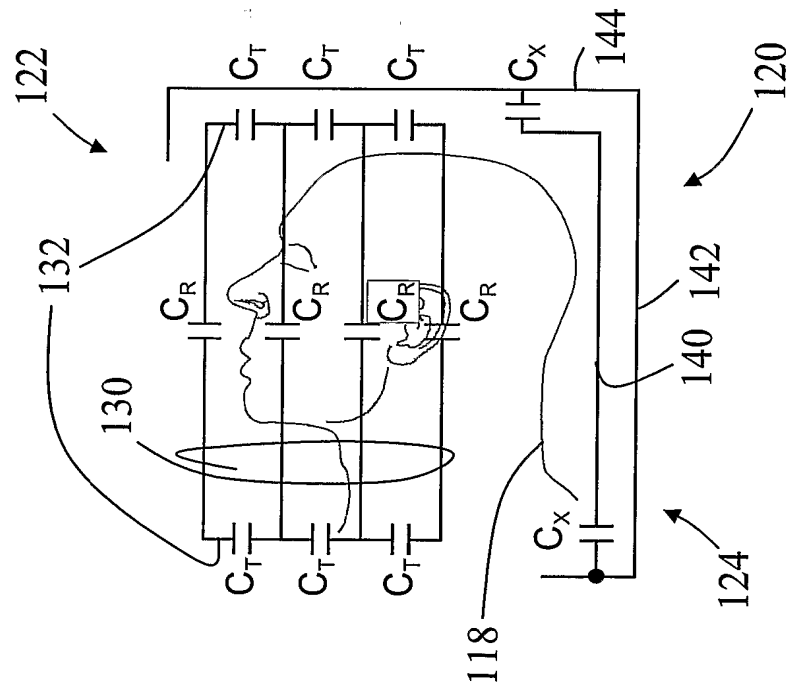
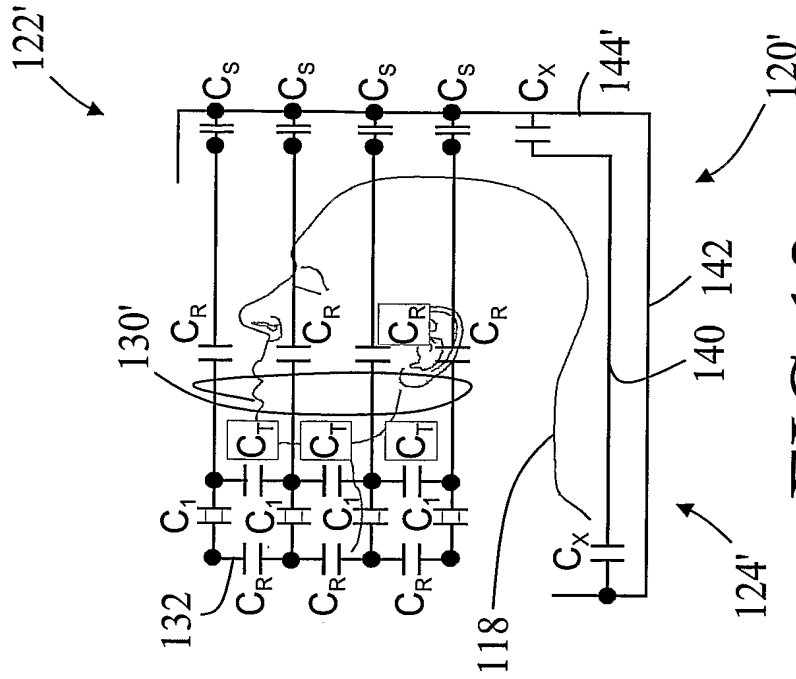


FIG 10



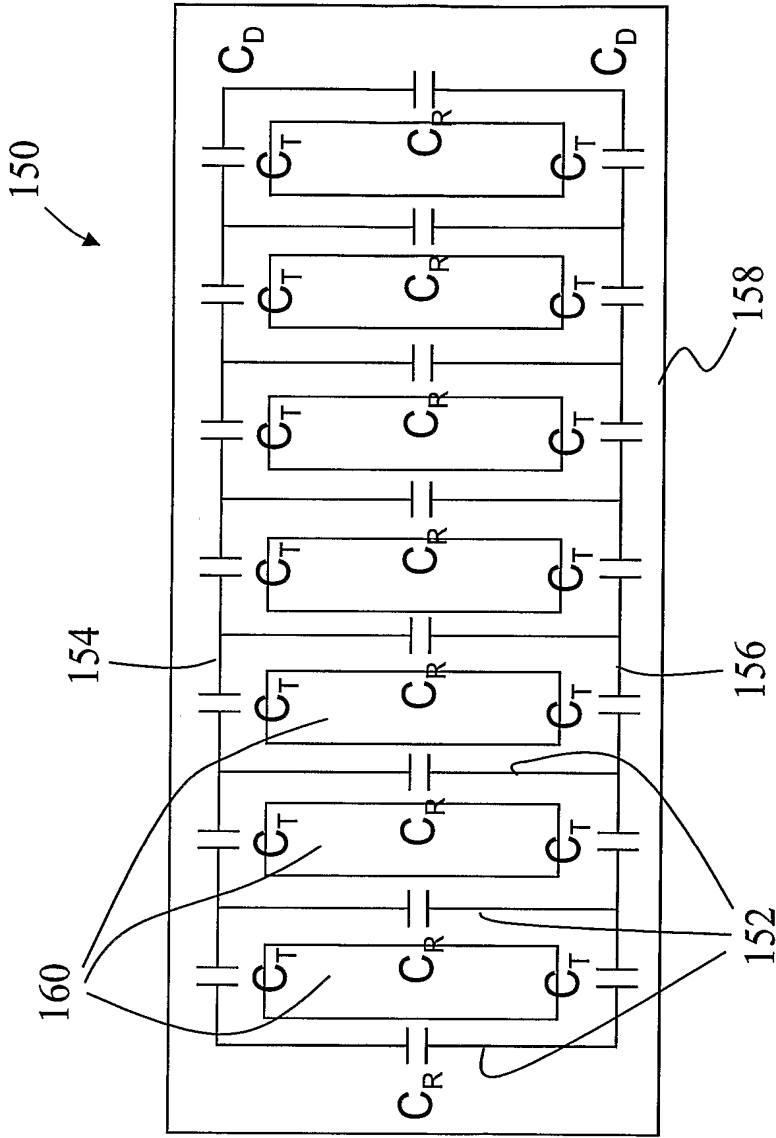


FIG 13

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2004/052290

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G01R33/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, COMPENDEX, INSPEC, BIOSIS, EMBASE, MEDLINE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 101 09 489 A (RAPID BIOMEDICAL BIOMEDIZINISC) 11 October 2001 (2001-10-11) the whole document	1,2,5-9, 11-17
Y	-----	10,18-20
Y	US 4 594 566 A (MAUDSLEY ANDREW A) 10 June 1986 (1986-06-10) column 6, line 14 - column 7, line 33 figures 2a-2c	19,20
Y	-----	
Y	US 6 591 128 B1 (CARLON JOHN T ET AL) 8 July 2003 (2003-07-08) the whole document	10,18
A	-----	
A	US 5 557 247 A (VAUGHN JR JOHN T) 17 September 1996 (1996-09-17) the whole document	1-20
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

4 January 2005

Date of mailing of the international search report

18/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Streif, J



## INTERNATIONAL SEARCH REPORT

onal Application No  
PCT/IB2004/052290

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	VAUGHAN T ET AL: "Volume coils for highest field MRI" IEEE ANTENNAS AND PROPAGATION SOCIETY INTERNATIONAL SYMPOSIUM. 2001 DIGEST. APS. BOSTON, MA, JULY 8 - 13, 2001, NEW YORK, NY : IEEE, US, vol. VOL. 1 OF 4, 8 July 2001 (2001-07-08), pages 378-381, XP010564508 ISBN: 0-7803-7070-8 the whole document	1-20
A	US 6 608 480 B1 (WEYERS DANIEL J) 19 August 2003 (2003-08-19) the whole document	1-20
A	EP 0 918 228 A (PICKER INT INC) 26 May 1999 (1999-05-26) the whole document	1-20
A	EP 0 290 187 A (ADVANCED NMR SYSTEMS) 9 November 1988 (1988-11-09) column 11, lines 2-25 figure 11	1-20
A	US 4 939 465 A (BIEHL REINHARD ET AL) 3 July 1990 (1990-07-03) the whole document	1-20

## INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/IB2004/052290

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10109489	A	11-10-2001	DE 10109489 A1	11-10-2001
US 4594566	A	10-06-1986	NONE	
US 6591128	B1	08-07-2003	EP 1337867 A2	27-08-2003
			JP 2004532658 T	28-10-2004
			WO 0239135 A2	16-05-2002
US 5557247	A	17-09-1996	US 5886596 A	23-03-1999
US 6608480	B1	19-08-2003	NONE	
EP 0918228	A	26-05-1999	US 6029082 A	22-02-2000
			EP 0918228 A2	26-05-1999
EP 0290187	A	09-11-1988	US 4751464 A	14-06-1988
			EP 0290187 A2	09-11-1988
			JP 1029102 A	31-01-1989
US 4939465	A	03-07-1990	DE 3522401 A1	02-01-1987
			DE 3670913 D1	07-06-1990
			EP 0206057 A2	30-12-1986
			JP 1685704 C	11-08-1992
			JP 3051174 B	06-08-1991
			JP 62049840 A	04-03-1987